




## Power control unit

### 9410

- Distributes supply voltage to the power rail
- Optional connection of backup supply
- Approved for installation in I.S. / Ex zone 2 / Div. 2
- Optional redundant supply for the power rail
- Must be installed on power rail, PR type 9400

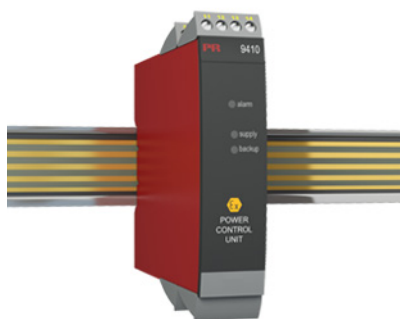

#### Application and advanced features


- The power control unit detects errors from any of the devices mounted on the power rail and transmits a collective alarm to the control system via the internal status relay.
- Optional connection of two power supplies - a primary supply and a backup supply.
- Redundant supply for the power rail can be obtained by mounting two 9410 devices connected to 2 separate power supplies (e.g. PR 9420).

#### Technical characteristics


- The status relay will be energised when the following three conditions are met: 1. Supply voltage is present on pins 31 and 32. 2. Backup supply voltage is present on pins 34 and 33. (If the backup supply is not in use, a jumper must be placed between pins 32 and 33 - the jumper is delivered with the device). 3. There are no error messages from the devices connected to the power rail.
- When a collective alarm is activated via the power rail, the status relay in the 9410 will be de-energized (pins 11, 12 and 13).
- Two green front LEDs indicate connection of supply and backup.
- A red LED indicates error status.

#### Applications

##### Device status relay from power rail



##### Power connections

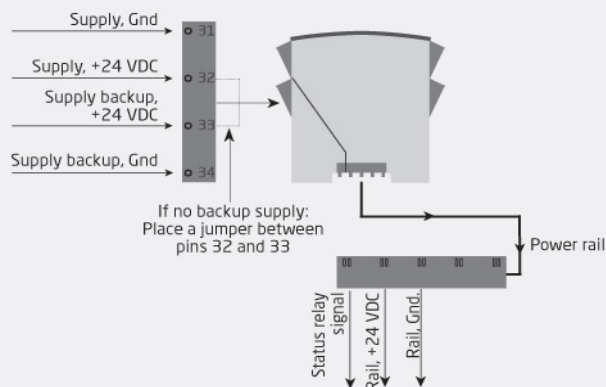

Zone 2 / FM Cl. 1, div. 2 or safe area

Order:

| Type |
|------|
| 9410 |

## Environmental Conditions

|                            |                      |
|----------------------------|----------------------|
| Operating temperature..... | -20°C to +60°C       |
| Storage temperature.....   | -20°C to +85°C       |
| Relative humidity.....     | < 95% RH (non-cond.) |
| Protection degree.....     | IP20                 |

## Mechanical specifications

|                            |                                                          |
|----------------------------|----------------------------------------------------------|
| Dimensions (HxWxD).....    | 109 x 23.5 x 104 mm                                      |
| Weight approx.....         | 140 g                                                    |
| Wire size.....             | 0.13...2.08 mm <sup>2</sup> AWG 26...14<br>stranded wire |
| Screw terminal torque..... | 0.5 Nm                                                   |
| Vibration.....             | IEC 60068-2-6                                            |
| 2...13.2 Hz.....           | ±1 mm                                                    |
| 13.2...100 Hz.....         | ±0.7 g                                                   |

## Common specifications

### Supply

|                                 |            |
|---------------------------------|------------|
| Max. required power.....        | 96 W       |
| Internal power dissipation..... | 2 W (max.) |
| Efficiency.....                 | > 97.9%    |

## Input specifications

|                     |                                                    |
|---------------------|----------------------------------------------------|
| Supply voltage..... | 21.6...26.4 VDC (double /<br>reinforced isolation) |
| Backup supply.....  | 21.6...26.4 VDC                                    |

## Output specifications

### Status relay

|                    |               |
|--------------------|---------------|
| Max. voltage.....  | 250 / 30 VDC  |
| Max. current.....  | 2 AAC / 2 ADC |
| Max. AC power..... | 500 VA / 60 W |

|                     |                               |
|---------------------|-------------------------------|
| Output voltage..... | Input voltage-0.5 VDC (@ 4 A) |
| Output power.....   | 96 W (max.)                   |
| Output current..... | 4 A (max.)                    |
| Output ripple.....  | Same as input ripple          |

## Observed authority requirements

|          |            |
|----------|------------|
| EMC..... | 2014/30/EU |
| LVD..... | 2014/35/EU |

## Approvals

|                      |                             |
|----------------------|-----------------------------|
| ATEX 2014/34/EU..... | KEMA 07ATEX0152 X           |
| IECEX.....           | KEM 08.0025X                |
| FM.....              | 3034431-C                   |
| INMETRO.....         | NCC 12.1308 X               |
| UL.....              | UL 61010-1                  |
| EAC.....             | TR-CU 020/2011              |
| DNV-GL Marine.....   | Stand. f. Certific. No. 2.4 |